

Lift company information/Delivery data (important: please fill in)

Client, contact person and telephone

Delivery address

Client code

Branch code

Required delivery date

General characteristics

Q, Load (kg)	Surface (m²)	Clear op. (mm)	R, Travel (mm)	Power supply (±5%)
<input type="checkbox"/> 225	≤ 0,90	700		<input type="checkbox"/> 230V 1 ~50 Hz
<input type="checkbox"/> 300	≤ 1,20	≤ 800		<input type="checkbox"/> Other
<input type="checkbox"/> 400	≤ 1,54	≤ 900	Nr. Stops (2, 3 or 4)	

Car characteristics

Entrance layout



Finishing

☐ Flex ☐ Estandar ☐ Advance ☐ Advance Nature ☐ Elegance ☐ Exclusive

Walls

☐ Galvanised sheet ☒ Laminated sheet ☒ Laminated sheet ☒ Laminated sheet ☒ Laminated sheet ☒ Brushed st. steel
☐ Laminated sheet ☒ St. steel mirror wall ☒ St. steel mirror wall

Glazed wall

☐ End wall (only layouts 2,3,5 or 6)
☐ Side wall (only layouts 1,2,3 or 4)

Floor

☐ Vynil flooring* ☐ Vynil flooring ☐ Vynil flooring ☐ Artificial stone ☐ Artificial stone ☐ Artificial stone

☐ Prepared for a 12 mm thickness flooring (not supplied)

* Not supplied in case of galvanised sheet walls

Options

<input type="checkbox"/> Half mirror	<input type="checkbox"/> Half mirror	<input type="checkbox"/> Half mirror	<input type="checkbox"/> Half mirror	<input type="checkbox"/> Column mirror	<input type="checkbox"/> Column mirror
<input checked="" type="checkbox"/> Handrail	<input checked="" type="checkbox"/> Handrail	<input checked="" type="checkbox"/> Handrail	<input checked="" type="checkbox"/> Handrail	<input checked="" type="checkbox"/> Handrail	<input checked="" type="checkbox"/> Handrail
<input checked="" type="checkbox"/> Plate COP	<input checked="" type="checkbox"/> Column COP	<input checked="" type="checkbox"/> Column COP	<input checked="" type="checkbox"/> Column COP	<input checked="" type="checkbox"/> Column COP	<input checked="" type="checkbox"/> Column COP
<input checked="" type="checkbox"/> Ceiling spotlights	<input checked="" type="checkbox"/> Lighting in column	<input checked="" type="checkbox"/> Double lighting	<input checked="" type="checkbox"/> Double lighting	<input checked="" type="checkbox"/> Double LED lighting	<input checked="" type="checkbox"/> Double LED lighting

☐ Conventional telephone

☐ Emergency telephone in COP

☐ Interphone in COP

☐ Emergency telephone in COP

☐ Interphone in COP

Laminated sheet colour

<input type="checkbox"/> Pearl grey	<input type="checkbox"/> Young ivory	<input type="checkbox"/> Bordeaux	<input type="checkbox"/> Nogal	<input type="checkbox"/> Beech	<input type="checkbox"/> Atlantic blue
<input type="checkbox"/> White cream	<input type="checkbox"/> Grey fog	<input type="checkbox"/> Capri blue	<input type="checkbox"/> Old oak	<input type="checkbox"/> Black nether	<input type="checkbox"/> Graphite grey
<input type="checkbox"/> Other (specify)					

Vynil flooring colour

<input type="checkbox"/> Brazilian Walnut	<input type="checkbox"/> Delta blue	<input type="checkbox"/> Satin wood
<input type="checkbox"/> Nocturne	<input type="checkbox"/> Silver mist	<input type="checkbox"/> Golden maple
<input type="checkbox"/> Other (specify)		

Artificial stone colour

<input type="checkbox"/> Capri white	<input type="checkbox"/> Spa concrete	<input type="checkbox"/> Tebas black
<input type="checkbox"/> Ivory coast	<input type="checkbox"/> Expo grey	
<input type="checkbox"/> Other (specify)		

Door characteristics

Car

☐ No doors (with light curtain)
☐ No doors (with light curtain)
☐ Folding with vision panel
☐ Folding glazed
☐ 2 leaf telescopic st. steel
☐ 3 leaf telescopic st. steel

Landing

Swing semiaut. vision panel
Swing semiaut. glazed
Swing semiaut. vision panel
Swing semiaut. glazed
2 leaf tel. { ☐ painted
3 leaf tel. { ☐ st. steel

Options

☐ Automatic landing door operator (only swing doors)


Entrances

1

2

Clear opening (mm)

Hand (swing doors)



Miscellaneous

Options

- ☐ Machine cabinet for hydraulic unit and control board
- ☐ Step ladder for maintenance from the car
- ☐ Preassembled guide unit (only for $R \leq 7$ m)
- ☐ Guides in 2.5 m sections (only without preassembled guides)
- ☐ Flexible piping length (m) (standard 3 m)
- ☐ Cylinder in two sections (only for $R > 7$ m)
- ☐ Position indicator
- ☐ Shaft lighting

Push button panel

Logotype in characteristics plate


Ref. in characteristics plate

Packing options


- ☐ Accessories and hydraulic power unit in wooden box
- ☐ Acc. standard for phytosanitary measures ISPM 15

Dimensions


Layout 2




Layout 3




Layout 1

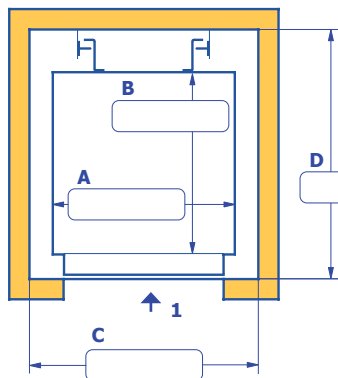


Layout 4

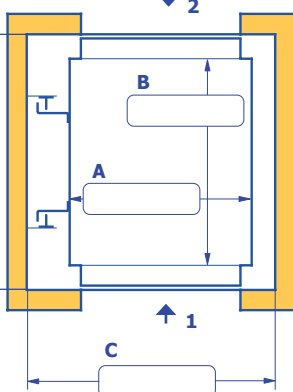

Layout 5

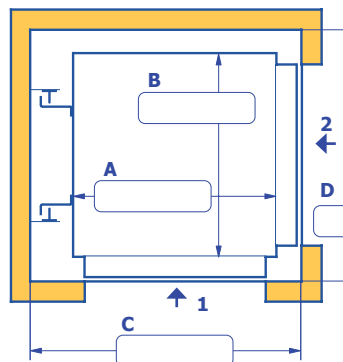

Layout 6

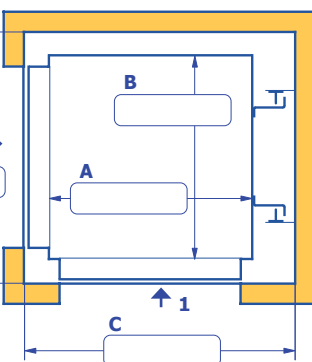


Accesses entrance 1

Landing designation

Headroom

Accesses entrance 2

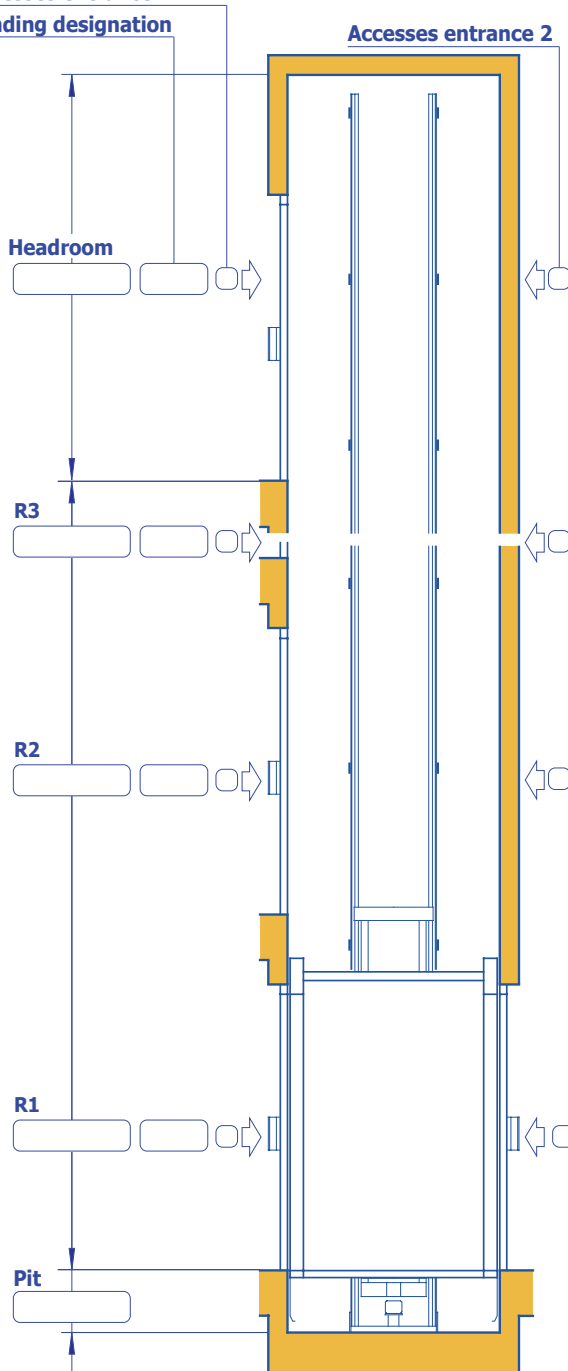

Structure characteristics

☐ Supply structure

Options



Installation of doors for side 1 of structure:

- ☐ Building
☐ Structure
☐ Roofing
☐ Suspended pit
☐ High resistance to corrosion finishing
☐ Colour RAL (standard grey RAL 7035)

Type of enclosure

- | | 1 | 2 | 3 | 4 |
|-------------------|------------------------------|--------------------------|--------------------------|--------------------------|
| None | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Solid metal sheet | <input type="checkbox"/> (*) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Glazed | <input type="checkbox"/> (*) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Glazed, frosted | <input type="checkbox"/> (*) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

(*) Only available for doors installed on the structure.

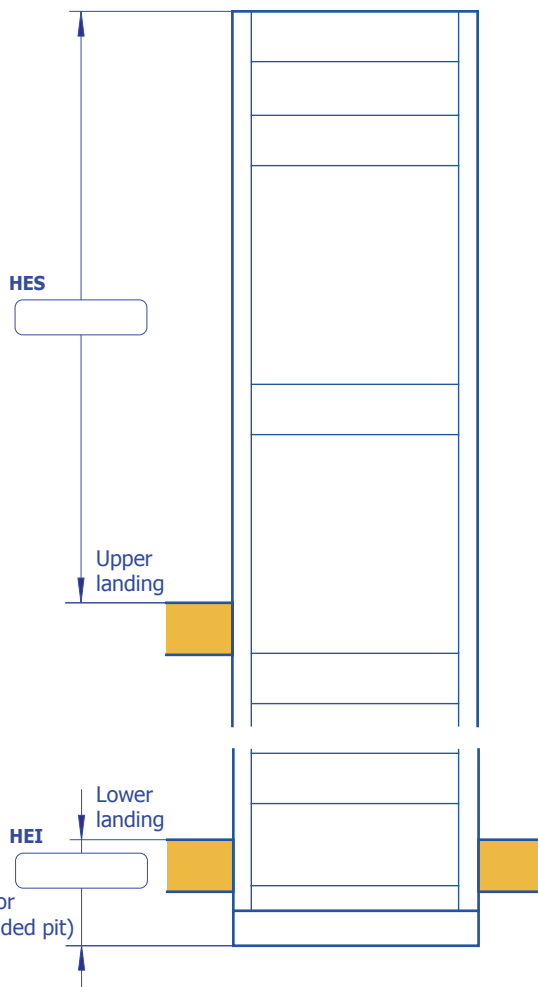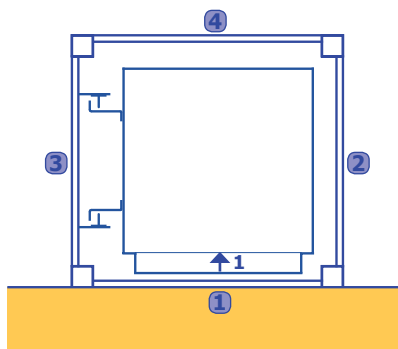
HES Distance from the upper landing level to the upper end of the structure

HEI Distance from the lower landing level to the lower end of the structure

Remarks